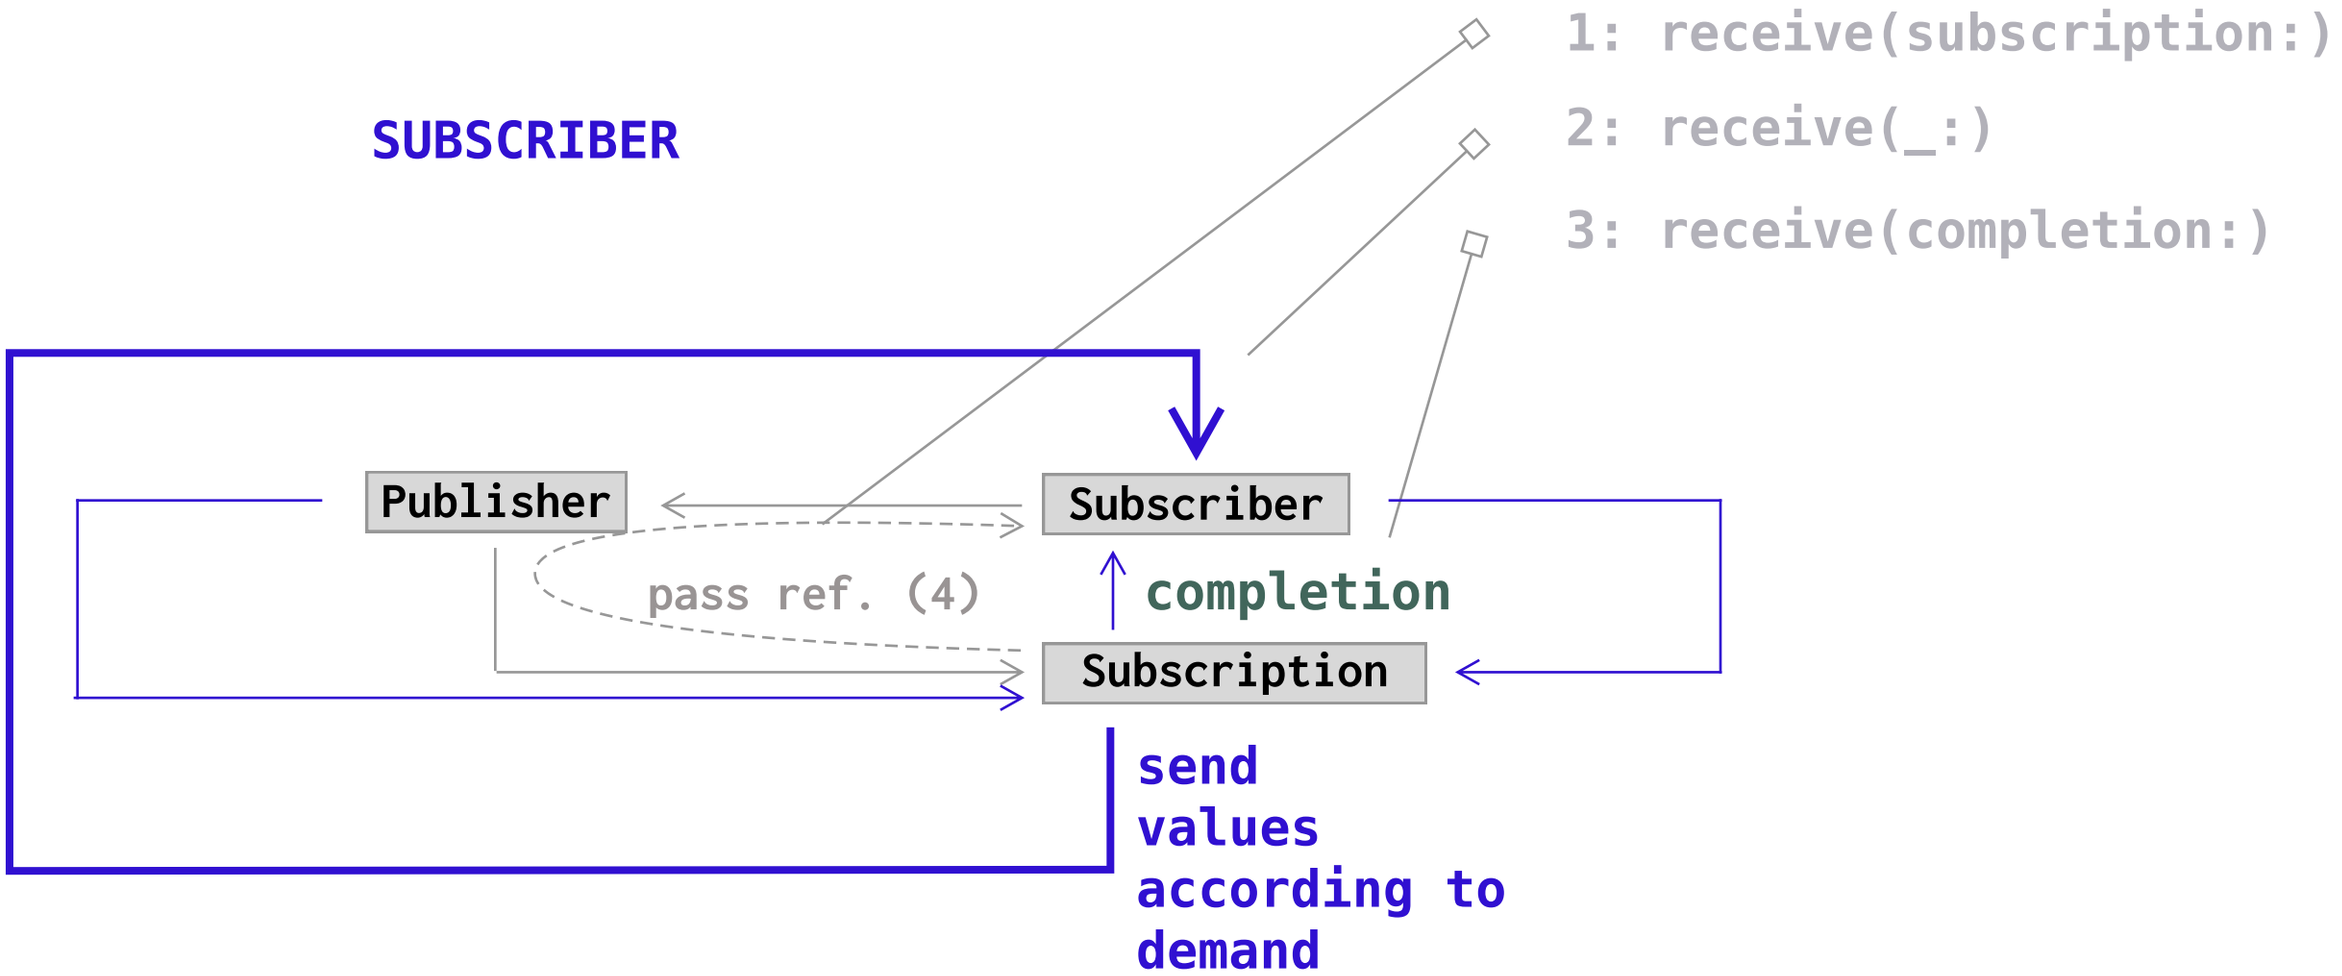
SUBSCRIBER
1: receive(subscription:)
2: receive(_:)
3: receive(completion:)
Publisher
Subscriber
pass ref. (4)
completion
Subscription
send values according to demand